

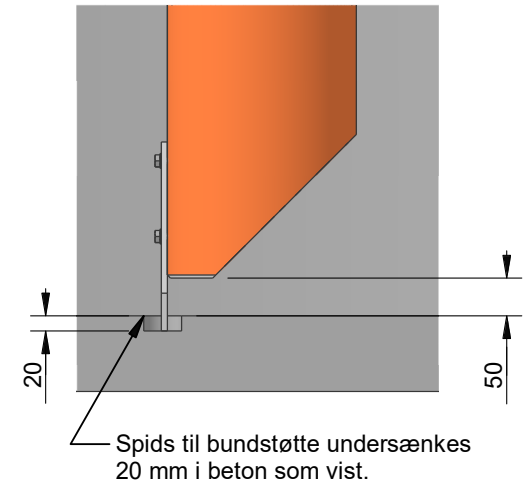


PVC røret (4) limes fast på overgangsrør (3) med sikaflex - 221



Røret tilpasses i længde, så der er 50 mm til bunden af tanken.  
Afsav røret i 45° som vist på tegningen og monter spids til bundstøtte

Pos	Qty	File name	Description	Material	Weight
1	1	100003	Sugetragt DN 250	EN 1.4404	7,675
2	1	100001	Pladefod for DN 250 sugetragt	EN 1.4301	13,177
3	1	100002	Svejsefittings overgang til PVC rør, DN 250	EN 1.4301	2,37
4	1	100007	PVC rør ø250x6,2x5000	PVC	14,731
5	1	105001	Spids til bundstøtte	EN 1.4301	0,486
7	4	Fladskive-10mm-DIN125-A4	Fladskive 10mm DIN125-A4	None	0,003
8	2	Låsemøtrik-M10DIN_985-A4	Låsemøtrik-M10-DIN_985-A4	None	0,014
9	2	BoltM10x30-DIN933-A4	BoltM10x30-DIN933-A4	None	0,03

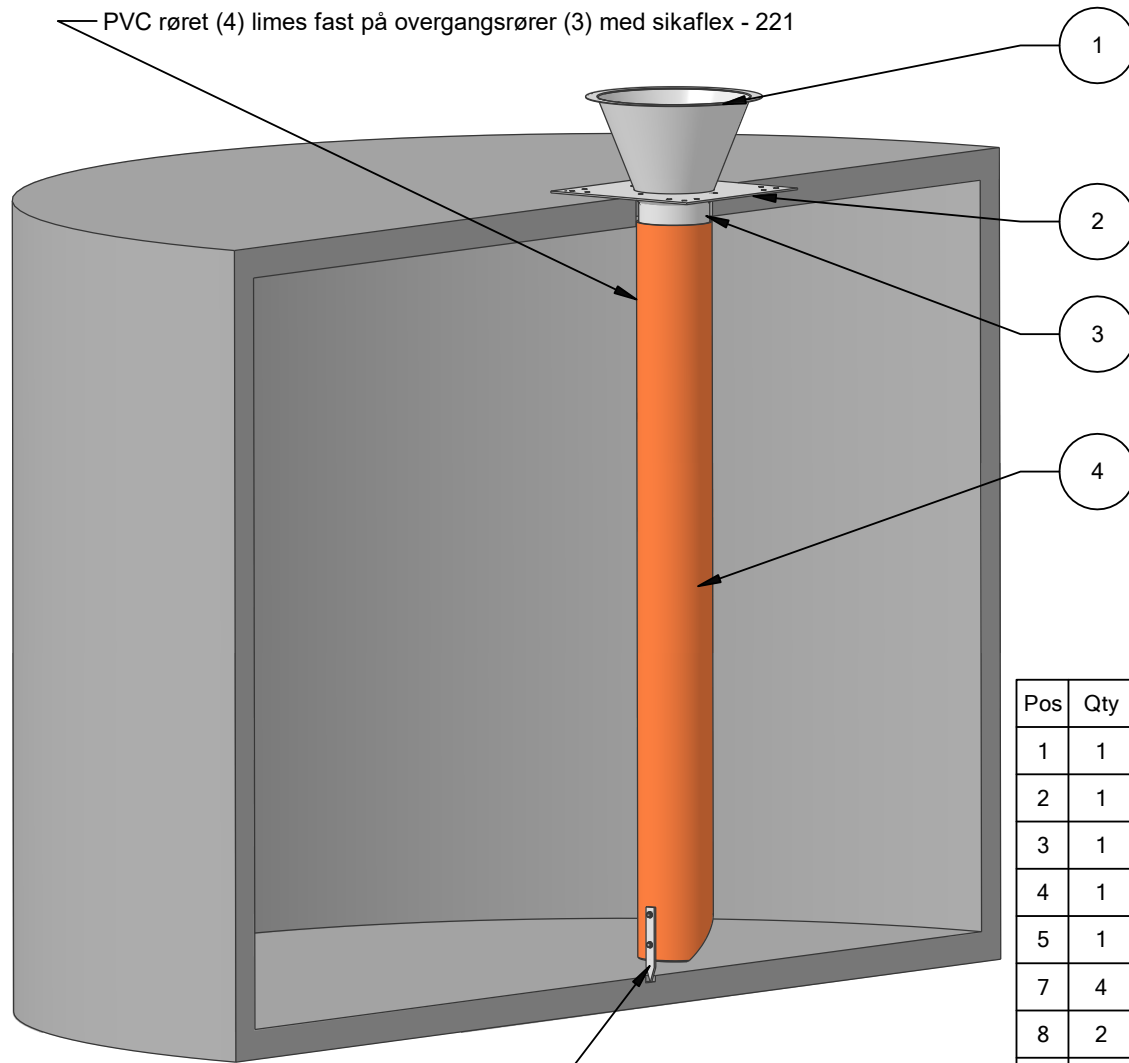

This drawing belongs to Lemvig Biogas. Improper use or copying is not permitted without previous permission in writing from Lemvig Biogas. The drawing may not be handed over to a third party.

Scale  
1:25 - 1:10

Format  
A4



### Lemvig Biogas

Pilevej 12, 7620 Lemvig  
Tlf. +45 97811400  
lemvigbiogas@lemvigbiogas.dk  
http://lemvigbiogas.com  
CVR nr. DK28450850

Not tolerance set dimensions according to ISO 2768-1 -m

Surface treatment

File name

110002

Drawing name

Sugetragt og PVC rør Installationstegning

Ral color

Date

01-04-2023

Proces

Init

BLK

Sheet

0 / 0

16.04.2023 LB / Lars